

HOT AIR BALLOON MAINTENANCE MANUAL

THIS MANUAL CONTAINS THE INFORMATION RELATED TO HOT AIR
BALLOONS CERTIFIED UNDER TYPE CERTIFICATES TR.BA.001 AND TR.BA.002

THE TECHNICAL CONTENT OF THIS DOCUMENT IS APPROVED UNDER THE
AUTHORITY OF DOA REF. TR.21J.003

MANUFACTURER:
PASHA BALLOONS URETIM
BAHCELIEVLER MAH. ATATURK CAD. NO. 18
ORTAHISAR/URGUP/NEVSEHIR/TURKEY
WWW.PASHABALLOONS.COM
INFO@PASHABALLOONS.COM



Pasha Balloons Maintenance Manual

Iss. 7
Rev. 0

Date 01 July 2024

TABLE OF CONTENTS

1. GENERAL	4
1.1. Introduction	4
1.2. Parts and Materials	4
1.3. Pilot Owner Maintenance	4
1.4. Systems description	5
1.4.1. Envelope description	5
1.4.2. Basket description	7
1.4.3. Burner description	8
1.5. Fuel Tank Description	10
1.6. Trouble-shooting information	11
2. ENVELOPE REPAIR INSTRUCTIONS	12
2.1. General	12
2.1.1. Permitted damage	12
2.1.2. Stitching	12
2.1.3. Envelope thread	12
2.1.4. Balloon Seam	12
2.1.5. Fabric repair limitations	13
2.2. Fabric repairs	14
2.2.2. Strip method	14
2.2.3. Self-Adhesive patch	14
2.3. Tape repairs	15
2.4. Control lines	17
2.5. Flying cables	17
2.6. Parachute replacement	18
2.7. Velcro replacement	18
2.8. Temperature indicators (flag and tag)	18
2.9. Preventive maintenance	18
3. BASKET REPAIR INSTRUCTIONS	19
3.1. General	19
3.1.1. Permitted damage	19
3.1.2. Damage prevention and material information	19
3.2. Wicker repair	19
3.3. Bottom leather repair	19



Pasha Balloons Maintenance Manual

Iss. 7
Rev. 0

Date 01 July 2024

3.4.	Top leather repair	19
3.5.	Rod covers replacement.....	19
3.6.	Padded walls replacement	20
3.7.	Runners replacement.....	20
3.8.	Plywood replacement	20
3.9.	Wires replacement.....	20
4.	BURNER REPAIRS	21
4.1.	General	21
4.2.	Main valve	21
4.3.	Liquid valve.....	21
4.4.	Pilot light	22
4.5.	Pressure gauge.....	22
4.6.	Burner coil	22
4.7.	Fuel hose.....	22
5.	FUEL TANK REPAIRS.....	23
5.1.	General	23
5.2.	Permitted Damage	23
5.3.	Liquid Valve Replacement	23
5.4.	Contents Gauge Replacement.....	23
5.5.	Bleed Valve Replacement.....	24
5.6.	Pressure Relief Valve Replacement.....	24
6.	MAINTENANCE SCHEDULES	25
6.1.	General	25
6.2.	Scheduled Inspections.....	25
6.3.	Unscheduled Inspections.....	25
6.4.	Inspection procedures.....	26
6.5.	Grab test procedure	31
6.6.	Pressure test for fuel tanks.....	31
7.	AIRWORTHINESS LIMITATIONS.....	33
7.1.	Life limited parts	33
7.2.	Structural inspection interval	33
7.3.	Structural Inspection procedures	33
8.	PARTS LIST	34

	Pasha Balloons Maintenance Manual	<i>Iss. 7 Rev. 0 Date 01 July 2024</i>
---	--	---

AMENDMENT LIST

Issue Number	Changes Description	Affected Pages	Issue Date
1	Initial issue	ALL	13-03-2019
2	New envelope models	ALL	30-07-2020
3	New basket models	1 to 5 and 8 to 26	30-09-2020
4	New basket, burner and envelope models	1 to 5 and 9 to 27	19-03-2021
5	Special shape models introduction	1 to 5 and 15 to 30	19-08-2021
6	Additional instructions and diagrams,header logo updated Section 1.4.3 burner figures updated Section 2.1.4 Balloon seam updated Section 6.1, 6.5 and 7.1 reviewed	ALL	28-11-2022
7	New fuel tank models	1 to 4, 11 to 12 and 22 to 33	01-07-2024



Pasha Balloons Maintenance Manual

*Iss. 7
Rev. 0*

Date 01 July 2024

LIST OF EFFECTIVE PAGES

Page	Issue number	Issue date
1	7	01-07-2024
2	7	01-07-2024
3	7	01-07-2024
4	7	01-07-2024
5	6	28-11-2022
6	6	28-11-2022
7	6	28-11-2022
8	6	28-11-2022
9	6	28-11-2022
10	6	28-11-2022
11	7	01-07-2024
12	7	01-07-2024
13	6	28-11-2022
14	6	28-11-2022
15	6	28-11-2022
16	6	28-11-2022
17	6	28-11-2022
18	6	28-11-2022
19	6	28-11-2022
20	6	28-11-2022
21	6	28-11-2022
22	7	01-07-2024
23	7	01-07-2024
24	7	01-07-2024
25	7	01-07-2024
26	7	01-07-2024
27	7	01-07-2024
28	7	01-07-2024
29	7	01-07-2024
30	7	01-07-2024
31	7	01-07-2024
32	7	01-07-2024
33	7	01-07-2024



Pasha Balloons Maintenance Manual

*Iss. 6
Rev. 0*

Date 28 Nov 2022

1. GENERAL

1.1. Introduction

This manual sets out the procedures and requirements to repair Pasha Balloons products.

The last version of this manual will be published at Pasha Balloons website (technical support section).

1.2. Parts and Materials

All repairs should be made with parts and materials approved by Pasha Balloons in this Maintenance Manual. All needed parts should be found in section 8 of this Manual. For further information, or parts not specified, contact Pasha Balloons.


1.3. Pilot Owner Maintenance

The following list of tasks are considered Pilot owner Maintenance. Pilot-owner tasks are only allowed when the owner holds a valid pilot license and certificate of registration shows it belongs to a single person or club, but not a company.

All this task should be recorded in balloon logbook and correctly signed.

Pilot-owner tasks are:

- Replacement of control lines.
- Replacement of karabiners.
- Replacement of temperature flag.
- Replacement of scoop or skirt.
- Sticky patch repair of envelope fabric.
- Bottom leather repair or replacement.
- Top leather repair or replacement.
- Rod covers repair or replacement.
- Padded covers of basket repair or replacement.
- General cleaning of burner.

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 6 Rev. 0 Date 28 Nov 2022</i></p>
---	--	---

1.4. Systems description

1.4.1. Envelope description

Envelopes are made of high tenacity nylon fabric sewn in panels. The fabric is coated to make it airtight inside. All the main loads on the envelopes are carried by polyester load tapes. Horizontal tapes act as rip stoppers so that any damage to the envelope will be limited in extent.

The base panels of the balloon are made from Nomex heat resistant fabric so that the nylon is kept at a sufficient distance from the flame to prevent heat damage. The lower ends of the load tapes are formed into rigging loops to which stainless steel cables, called flying cables, are attached. These steel cables are grouped in 4 or 8 groups and attached with a steel carabiner to the load frame.

Envelope is fitted with a 'Parachute' deflation system operated by a control line from the basket to release hot air outside, 'Fast deflation system' operated by a control line from the basket to release massive quantities of hot air outside and it must be used only below 10m height and for landing procedure. Envelope may also be fitted with rotation vents, which allow envelope to rotate left or right side from vertical axis. Ropes for rotation vents are differentiated as left rotation corresponds to black cord and right rotation corresponds to green rope.

The base of the balloon may be fitted with a scoop or skirt. This improves the performance of the balloon when taking off or tethering in wind, and during flight in turbulent conditions.

Balloon envelope does not have any assembly part, so no further instruction is required for this issue.

Balloon envelope must be handled with care and considering that any pointed object or sharp edge could damage the fabric. It also must be always handed by human force; it is not allowed to drag it with mechanical forces as they could damage the structure.

The following sketch shows all parts of the balloon:

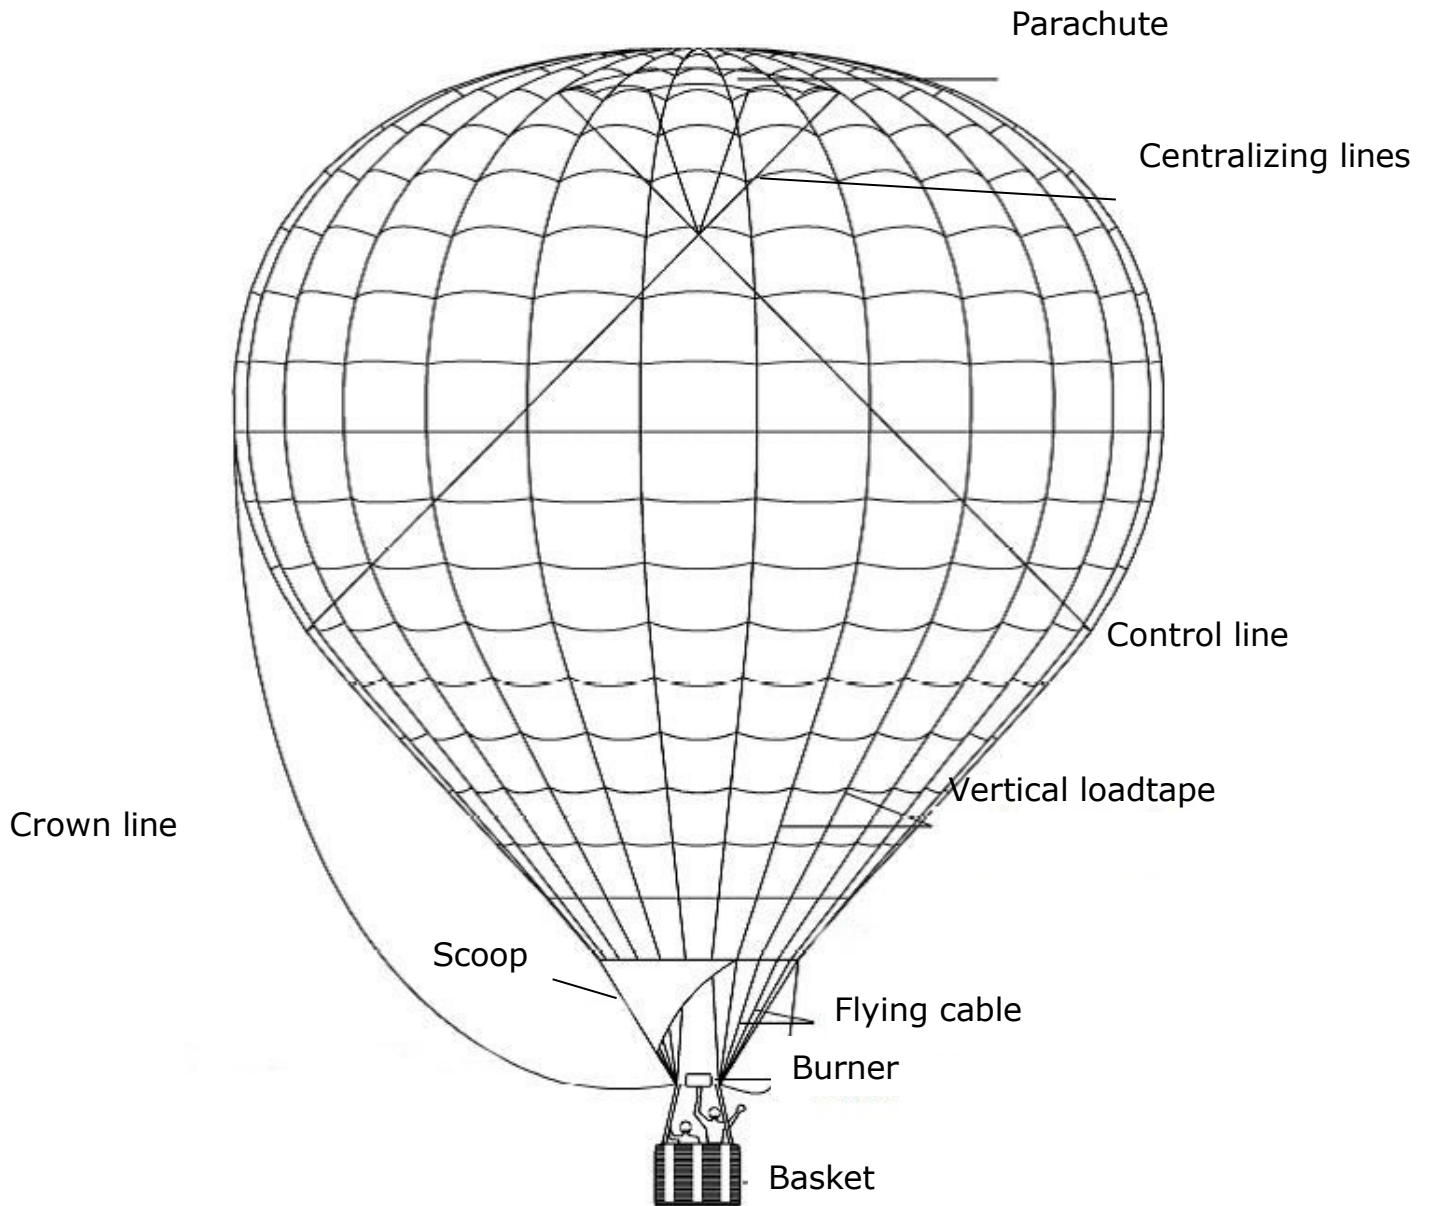


Figure 1. Envelope general view

1.4.2. Basket description

Pasha Balloons baskets are wicker woven baskets designed to fly under hot air balloons. These are classical baskets used in the industry for many years.

Baskets are manufactured using a plywood base attached to metallic structure and wooden poles creating a mesh. This mesh is “woven” with wicker due to flexibility of the material. Suspension structure is placed inside the woven wicker and pass beneath the basket being protected of any wear or abrasion. Leather and foam are used to protect passenger of metallic and plastic parts.

Nylon poles are used to keep load frame in position during inflation and landing. They are covered with padded leather to protect passengers and pilot during landing.

Basket is fitted with handholds for pilot and all passengers. Also, it is equipped with restraint system fitting point for pilot and all passengers.

The following drawing shows all parts of the basket:

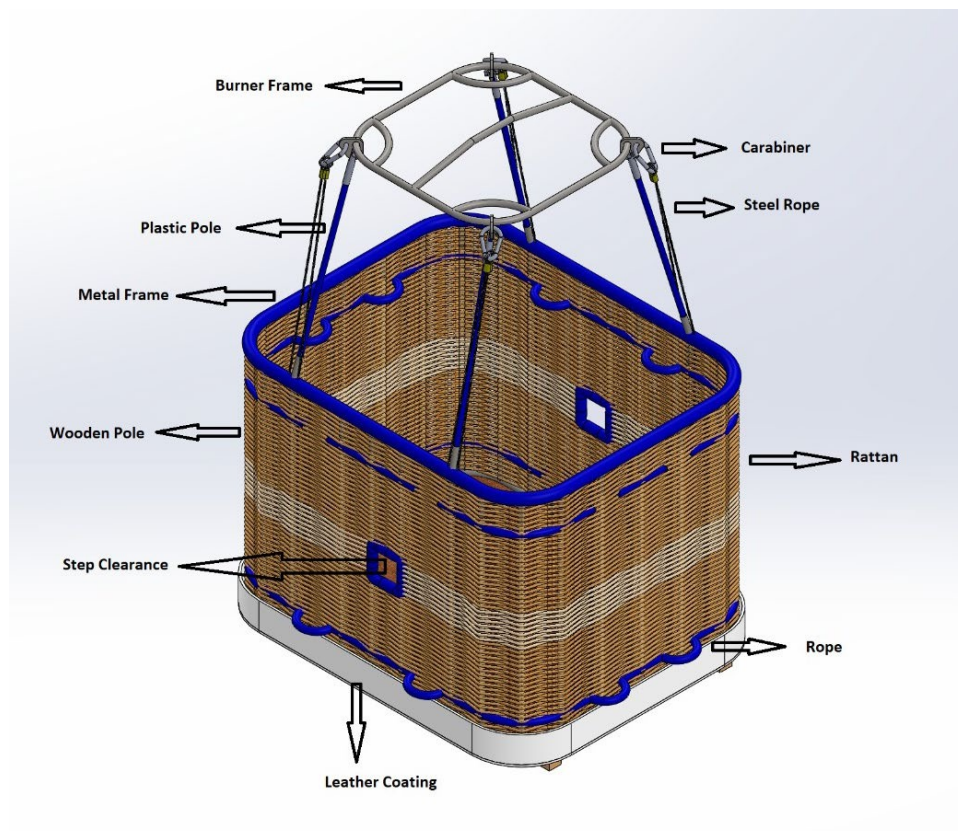


Figure 2. Basket general view

1.4.3. Burner description

Burner is the source of heat for hot air balloons. Liquid propane used to heat air inside the hot air balloon envelope. Pasha Balloons burner are available in double, triple and quadruple configuration. These figures show how Pasha Balloons burner look.



Figure 3. Double burner general view



Figure 4. Triple burner general view



Figure 5. Quadruple burner general view

Burner consists in a group of valves and subassemblies. These subassemblies are:

Main burner

Main valve (on/off) controls the flow of fuel. This fuel passes through burner coil to increase the temperature of the fuel and through blast jet ring before combustion. Main valve has flat or rugged surface to differentiate fuel flow input.

Whisper burner

Whisper valve (on/off) controls the flow of fuel directly burnt without going through burner coil. The flame produced is less powerful but more silent. When continuous use of whisper burner, frozen droplets of propane may appear at the jet nozzle, STOP usage of whisper burner when it is occurred.

Pilot light

Pilot light provides continuous flame for burner ignition. Fuel passes through pilot light valve (rotary valve) and through pilot light regulator to provide a continuous vapour fuel flow. Every pilot light has its own piezo igniter which allows pilot light relighting in case of flame out.

Pressure gauge

Pressure gauge is fitted to every fuel supply to indicate the pressure of the fuel inside the block.

Fuel supply

One fuel supply is fitted to every burner unit (two, three or four fuel supplies depending on burner configuration). These fuel hoses are coloured at both ends to easily determine fuel tank source for each burner.

1.5. Fuel Tank Description

Hot air balloons use a fuel tank filled with LPG mixture to feed the burner. Pasha Balloons fuel tanks are available in three different models, T77, T88 and T99.

Fuel tanks are manufactured in duplex stainless steel with soft padded coverings. On all tanks there are a liquid supply with proper screw joint, level gauge, bleed valve, pressure relief valve and major fuel liquid valve. The float fuel quantity gauge and max fill bleed valve serve for the purpose of checking. Every fuel tank is also equipped with a pressure relief valve.




*Figure 6. T77 model fuel tank
general view*



*Figure 7. T88 model fuel tank
general view*




*Figure 10. T99 model fuel tank
general view*

	Pasha Balloons Maintenance Manual	<i>Iss. 7 Rev. 0 Date 01 July 2024</i>
---	--	---

1.6. Trouble-shooting information

Hot air balloons envelopes, baskets and burners are not a complex product that would require trouble-shooting information to find what could be the origin of the malfunction. As there is no mechanism, no trouble-shooting procedure is established. For further information, please contact Pasha Balloons.

	Pasha Balloons Maintenance Manual	<i>Iss. 6 Rev. 0 Date 28 Nov 2022</i>
---	--	--

2. ENVELOPE REPAIR INSTRUCTIONS

2.1. General

2.1.1. Permitted damage

Permitted damage to the fabric in the lower third of the balloon is permitted while it is affecting no more than 2 panels with a maximum damage of 100mm.

Holes below 10mm diameter are not considered as damage and balloon can fly with them.

2.1.2. Stitching

Following stitching characteristics are required to repair Pasha Balloons envelopes.

Stitch type: Lock Stitch

Stitch length: 5-8 stitches per 25mm


Twin needle spacing: 5/16" (8mm) or 3/8" (9,5mm)


2.1.3. Envelope thread

Thread to be used is nylon three-strand bonded thread. It must be metric 40 and must make contrast with envelope fabric.

2.1.4. Balloon Seam

The seam used is French Fell Seam (balloon seam). Both folded edges of fabric must be penetrated by both rows of stitching. Distance between threads must be between 8 and 9mm and seam width must be between 13 and 15mm. The end of stitching line should be back tacked between 10 and 30 mm. When a bobbin needs to be changed, a minimum length of 150 mm must be overlapped.

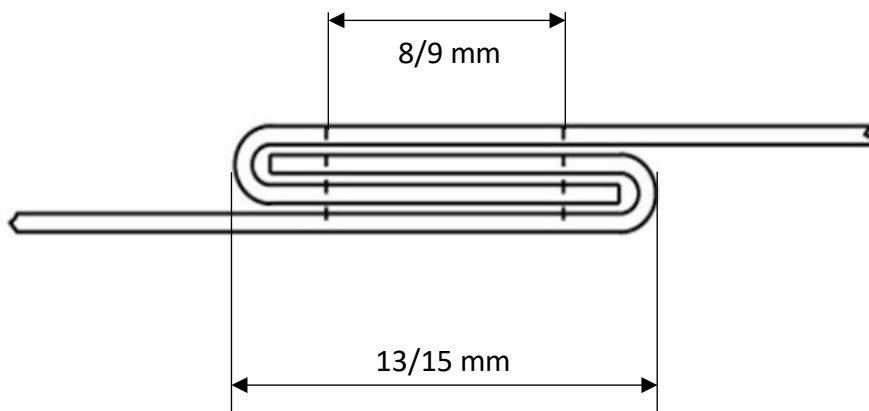

	<p>Pasha Balloons Maintenance Manual</p>	<p><i>Iss. 6 Rev. 0 Date 28 Nov 2022</i></p>
---	---	---

2.1.5. Fabric repair limitations

Maximum number of panels to be replaced at one time must be limited to 10% of the total envelope panels. When the extension of the repair goes beyond this limit, written approval from Pasha Balloons is required.

Scoop repair is not included in this limitation and can be repaired replacing panels.

2.2. Fabric repairs

2.2.1. Panel replacement

To replace a panel, following steps must be followed.

1. Unpick all the stitching of the damaged panel. When a seam is covered by horizontal tape, it should be taken out to show the panel stitching. Vertical tapes will be unpicked at the same time than panel seam.
2. A non-damaged panel may be used to copy the dimensions of replaced panel.
3. The new panel should be installed using French Fell seam. 150mm overlapping seam must be used when joining to original panels. Vertical and horizontal tapes must be sewn after panel seam using 150mm overlap too.

2.2.2. Strip method

Strip method may be used as an alternative to panel replacement. If damaged is closer to 25mm to any of the original seams, the seam must be unpicked, and the strip extended to the original edge of the panel. Vertical strips are used and the following steps must be followed.

1. Partially unpick the seam of top and bottom edge of the panel where damage is present (see panel replacement method if tapes are affected).
2. Remove a vertical strip of the panel allowing 30-40mm at both sides of the damage.
3. Use the removed strip to cut a new piece of fabric allowing 40mm extra at each side (for double fell seam)
4. Install the vertical strip to the original panel using double fell seam.
5. Sew the original seam with new vertical strip completing the original panel. (see panel replacement method if tapes are affected)

2.2.3. Self-Adhesive patch


Self-Adhesive patch supplied by Pasha Balloons may be used when damaged extension is not bigger than 200mm (longest dimension). The procedure is:

1. Cut a piece of adhesive fabric (spinnaker type) that exceeds the damage and overlap non-damaged fabric by 25mm in all the direction.
2. Attach the adhesive fabric to the clean fabric. When ready, repeat the procedure in the other side of the panel to have adhesive both sides of the panel.
3. When damage is at hyperlast fabric or top two thirds of the envelope, stitching all around the patch must be used.

2.3. Tape repairs

When damage is present in any tape, identical specification tape must be used to repair it. Written approval must be obtained from Pasha Balloons to use different tape than provided by Pasha Balloons. Tape repair consist to remove any sharp edge from the damaged tape (in case of burnt tape or burnt fabric) and install a new piece of tape overlapping 1 meter each side after damaged area.

Two rows of stitching needs to be used when installing new tape and one gate of 20x50mm must be used at each end of new tape. Two more gates of 20x50mm must be stitched, one at each side of damaged tape where one meter overlap starts.

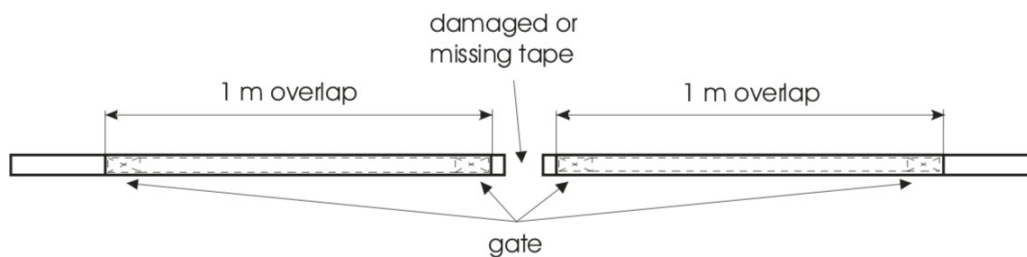

Different models of envelopes use different tape width. The following table must be checked to determine which tape is applicable to envelope models:

Model	Tape width
PH-60	18/26mm
PH-65S	18/26mm
PH-70	18/26mm
PH-75S	18/26mm
PH-80	18/26mm
PH-90	18/26mm
PH-105	18/26mm
PH-120	18/26mm
PH-135	18/26mm
PH-150	18/26mm
PH-165	18/26mm
PH-180	18/26mm
PH-210	26mm

Model	Tape width
PH-240	26mm
PH-270	26mm
PH-300	26mm
PH-335	26mm
PH-370	26mm
PH-425	26mm
PH-460	26mm
PH-500	26mm
PH-525	26mm
PS-HEART	18mm
PS-ROCKET	18mm
PS-FLAG	18mm

2.4. Control lines

Parachute control line is installed with around 2 meters excess to allow the extension of it when needed. If damage occurs at the beginning of the control line (close to the basket) it may be possible to extend the line to remove the damaged rope. Hot inflation is needed to check the rope is long enough to operate correctly.

2.5. Flying cables

No repair is allowed on flying cables, only replacement with original spares supplied from Pasha Balloons.


When replacing a flying wire, the following procedure should be followed.

1. Unpick 80-100mm of the stitching of the mouth tape around the vertical tape connecting to the damaged flying wire.
2. Unpick all the stitching of vertical tape turnback (one panel) to “open” the vertical tape and allow damaged flying cable to be removed.
3. Install the new flying cable.
4. Close the vertical tape and sew it with the turnback.
5. Install the vertical tape with nomex panel.
6. Sew the original mouth tape overlapping seam minimum of 50mm.

Different models of envelopes use different stainless steel wire diameter. The following table must be checked to determine which diameter is applicable to envelope model:

Model	Wire diameter
PH-60	3mm
PH-65S	3mm
PH-70	3mm
PH-75S	3mm
PH-80	3mm
PH-90	3mm
PH-105	3mm
PH-120	3mm
PH-135	3mm
PH-150	3mm
PH-165	3mm
PH-180	3mm
PH-210	4mm

Model	Wire diameter
PH-240	4mm
PH-270	4mm
PH-300	4mm
PH-335	4mm
PH-370	4mm
PH-425	4mm
PH-460	4mm
PH-500	4mm
PH-525	4mm
PS-HEART	3mm
PS-ROCKET	3mm
PS-FLAG	3mm

	<p>Pasha Balloons Maintenance Manual</p>	<p><i>Iss. 6 Rev. 0 Date 28 Nov 2022</i></p>
---	---	---

2.6. Parachute replacement

When parachute needs to be replaced by damage of fabric deterioration according to grab test results, please contact Pasha Balloons.

2.7. Velcro replacement

Velcros can be replaced when they are not capable to keep the parachute attached during windy inflation, or at pilot discretion. Identical Velcro must be used for replacement. The procedure is to unpick the seam of the Velcro and sew a new one without exceeding Velcro borders to avoid zipper effect.

2.8. Temperature indicators (flag and tag)

Temperature tag may not be replaced, new one must be installed next to the old one. One row of stitching is enough for temperature indicators when installed.

Temperature flag link must be replaced with a new part when it is melted (flag dropping).

2.9. Preventive maintenance

Hot air balloon envelopes preventive maintenance consists on cleaning pulleys from dust to reduce rotation friction. Compressed air cleaning is recommended every 100FH (no grease is required as it may leaks to the fabric).

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 6 Rev. 0 Date 28 Nov 2022</i></p>
---	--	---

3. BASKET REPAIR INSTRUCTIONS

3.1. General

3.1.1. Permitted damage

Damage is only permitted at wicker when it is smaller than 30mm in any direction and at top and bottom leather when the damage is not allowing to see bottom part of leather.

3.1.2. Damage prevention and material information

Basket may be protected with a correct application of linseed oil for wicker and with a correct storage after cleaning. Most of used materials are natural and they experience an evolution depending on humidity and sun incidence.

3.2. Wicker repair

When wicker is damaged, it must be replaced using the same weaving technique. Wicker must be replaced 200mm in both direction of damage to avoid a small piece of wicker being installed.

For the correct behavior of wicker, apply linseed oil after replacing wicker.

3.3. Bottom leather repair

If damage is extensive enough that plywood is exposed, a minimum patch of 200mm shall be installed. For the installation, attach the top part to wicker following the same installation of original leather. When installed, tight the piece and staple to plywood with stainless steel staples.

3.4. Top leather repair

If damage is extensive enough that foam or basket frame is exposed, leather must be repaired using a patch of 200mm. Patch is installed following original leather installation “sewing” it with 3mm polyester rope to the wicker.

3.5. Rod covers replacement

If damage is extensive enough that nylon rods or basket wires are exposed, rod covers must be replaced by new ones ordered from Pasha Balloons.

	Pasha Balloons Maintenance Manual	<i>Iss. 6 Rev. 0 Date 28 Nov 2022</i>
---	--	--

3.6. Padded walls replacement

If damage is extensive enough that passenger is not protected from wicker, padded walls must be replaced by new ones ordered from Pasha Balloons.

3.7. Runners replacement

If any damage is found on basket runners, written instructions must be requested to Pasha Balloons in order to repair or replace.

3.8. Plywood replacement

If any damage is found on basket plywood, written instructions must be requested to Pasha Balloons in order to repair or replace.

3.9. Wires replacement

If any damage is found on basket wires, written instructions must be requested to Pasha Balloons in order to repair or replace.

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 6 Rev. 0 Date 28 Nov 2022</i></p>
---	--	---

4. BURNER REPAIRS

4.1. General

Hot air balloons burner repairs are mainly composed by preventive maintenance and lubrication procedures, not repairing damaged parts. If any damaged part cannot be replaced, please contact Pasha Balloons to receive detailed instructions.

Detailed drawings will be provided by Pasha Balloons to Falcon burner operators. Approved maintenance organization may receive this documentation from operators.

4.2. Main valve


Main valve is a lever-system valve. Preventive maintenance may require lubrication of valve stem. This lubrication is performed removing valve stem and applying krytox grease (see IPC document referred at section 8) to it.

To remove main valve, remove allen-key handle screws first. Then, complete main valve subassembly should be removed with spanner key. Special attention should be taken to rubber seat seal and bonded washer every time main valve body is disassembled. If any sign of damage is advised, any of these seals must be replaced.

4.3. Liquid valve

Liquid valve is a lever-system valve. Preventive maintenance may require lubrication of valve stem. This lubrication is performed removing valve stem and applying krytox grease (see materials section) to it.

To remove liquid valve, remove allen-key handle screws first. Then, complete liquid valve subassembly should be removed with spanner key. Special attention should be taken to rubber seat seal and bonded washer every time main valve body is disassembled. If any sign of damage is advised, any of these seals must be replaced.

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 7 Rev. 0 Date 01 July 2024</i></p>
---	--	--

4.4. Pilot light

Pilot light subassembly is composed by pilot light torch and pilot light regulator.

Pilot light torch is a maintenance free subassembly, if any damage is found at this part, it should be replaced using allen screw to remove and installing the new one at the same position.

Pilot light regulator is actuated with a rotary valve. Preventive maintenance may require regulator cleaning from oils and paraffins accumulated in the fuel. In order to clean the regulator, allen key must be used to disassembly valve handle. Then, spanner key is needed to remove pilot light regulator body. Once the body is disassembled, use to spanner keys to open regulator body and clean any oil or paraffin accumulated with a soft piece of cloth or soft paper. Krytox grease may be used after cleaning on all seals.

4.5. Pressure gauge

Pressure gauge is a maintenance free component. If any damaged is advertised, it must be replaced. In order to replace it, allen key must be used to unscrew protective case, then pull pressure gauge and replace with a new one.

4.6. Burner coil

Burner coil is a maintenance free component. If any damage is advertised, please contact Pasha Balloons to order spare subassembly and receive detailed instructions.

4.7. Fuel hose

Fuel hose is a maintenance free component. If any damage is advertised it may be replaced. To replace fuel hose, use spanner key to disassembly from burner block. When fuel hose is replaced, bonded washers must be replaced too.

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 7 Rev. 0 Date 01 July 2024</i></p>
---	--	--

5. FUEL TANK REPAIRS

5.1. General

Regular inspection of fuel tanks is essential to prevent leakages. Fittings are always to be kept clean. If during a repair or inspection no definite conclusion can be reached as to whether the damage or defect found in the fuel tank is acceptable, Pasha Balloons should be contacted.

5.2. Permitted Damage

No damage is allowed on fuel tank body. Footer and top guard may have some damage or bending as long as it is not affecting the main purpose of protecting main body. For footer it must be confirmed that main body is not in contact with ground. For top guard it must be confirmed that all valves remain inside the space created by top guard.

Regarding fuel tank body, no crack, bulge or gouge is permitted on it. Dents must be evaluated and controlled one by one. If any dent is found, contact Pasha Balloons for detailed instructions.

5.3. Liquid Valve Replacement

If any damage or leak is found on liquid valve, it must be replaced for a new one. Remove old liquid valve with adjustable spanner key. Install new valve using yellow PTFE Teflon and tight new valve in the boss with specific torque of 110-200 Nm. Liquid valve must be correctly orientated, so after minimum torque is guaranteed, extra tighten is required to orientate it correctly. REGO connector and valve handle can be transferred from old valve to new one if they are ok (use following instructor for replacement to install in the new valve).

If any damage or leak is found on REGO connector, it must be replaced for a new one. Remove REGO connector with adjustable spanner key. Install new valve using yellow PTFE Teflon and tight new valve in the boss with specific torque of 40-50 Nm.

5.4. Contents Gauge Replacement

Content gauges repairs can occur in two situations.

When there is a leak on the gauge, gasket must be replaced. For this purpose, unscrew the 4 M6 bolts of the content gauge. Once removed, replace gasket and clean boss surface. Install again the content gauge and tight 4 bolts using Loctite 243 with specific torque of 3-5 Nm.

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 7 Rev. 0 Date 01 July 2024</i></p>
---	--	--

When there is any malfunction of content gauge, it must be determined if malfunction is coming from dial or from floating device. In order to confirm origin, gauge must be uninstalled unscrewing 4 bolts. When outside, manually move floating device to determine origin of malfunction.

In case dial is not working properly, it must be replaced by a new one unscrew 2 phillips screws and installing new one. Be careful when screwing Phillips screws as plastic case may broke.

In case floating device or gauge is not working properly, it must be replaced. When installing, take special care about gasket and recommendation is to always install it with new gasket. Tight 4 screws using Loctite 243

5.5. Bleed Valve Replacement

If any damage or leak is found on bleed valve, it must be replaced for a new one. Remove old bleed valve with adjustable spanner key. Install new valve using yellow PTFE Teflon and tight new valve in the boss with specific torque of 28-50 Nm.

5.6. Pressure Relief Valve Replacement

If any damage or leak is found on pressure relief valve, it must be replaced for a new one. Remove old valve with adjustable spanner key. Install new valve using yellow PTFE Teflon and tight new valve in the boss with specific torque of 110-200 Nm.

NOTE : Wear safety glasses when replacing valves and always double check fuel tank is completely empty before opening it.

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 7 Rev. 0 Date 01 July 2024</i></p>
---	--	--

6. MAINTENANCE SCHEDULES

6.1. General

Pasha Balloons recommends this schedule inspections for all Pasha balloons parts. Maintenance schedules are Pre-flight inspection, annual inspection and unscheduled inspections.

When balloon plans to be stored for more than 6 months without flying, following considerations should be observed in order to prevent dangerous situations. Fuel tanks and fuel lines must be empty, balloon must be stored in a dry place and fuel hoses must not be twisted or bended with small radius.

In the situation that the balloon has been stored for some time without performing annual inspections, detailed care must be taken to burner and grab test checks. Metallic and non-metallic components may be affected differently depending on storage conditions and despite annual inspection considers inspection of all components, special attention to corrosion, wear or deformation signs must be considered.

6.2. Scheduled Inspections

Pre-flight inspection

Before every flight, Pilot in command must perform preflight inspection to guarantee the airworthiness of the balloon.

Annual/100FH inspection

Pasha Balloons envelopes must be inspected in a regular basis every 12 calendar months or 100 flight hours, whichever occurs sooner. Section 6.4 checklist must be followed by inspector.

Pasha Balloons baskets and burners must be inspected in a regular basis every 12 calendar months. Section 6.4 checklist must be followed by inspector.

6.3. Unscheduled Inspections

Powerlines contact

After powerlines contact of any hot air balloons, annual inspection should be performed to check all the components keep airworthy.

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 7 Rev. 0 Date 01 July 2024</i></p>
---	--	--

Overheating

When temperature indicator or temperature tag show that 120°C have been exceeded, annual inspection of envelope must be performed before next flight to check all the components keep airworthy. This inspection must be performed if temperature flag link melts and flag felt to basket.

Transport accident

After any transport accident of the balloon, annual inspection should be performed to check all components keep airworthy.

6.4. Inspection procedures

To perform a correct inspection, the adequate checklist must be used. Pre-flight inspection checklist must be used for pre-flight inspection and Annual/100FH checklist must be used for any other inspection.

For every point of the checklist, use criteria to determine if damage is present or not. Except for fabric, no damage is allowed in any part of the envelope, so this principle must be followed during all the inspection. In case any item fails the inspection criteria, it must be repaired according to section 2 of this HABMM before released to service.

Regarding grab test, please refer to section 6.5 of HABMM for diagrams and detailed instructions.

	Pasha Balloons Maintenance Manual	<i>Iss. 7 Rev. 0 Date 01 July 2024</i>
---	--	---

6.4.1. Pre-flight inspection checklists

<i>Pre-flight inspection checklist (envelope)</i>		
Envelope Component	Criteria	Pass (✓) / Fail (x)
Crown line	Check for damage or wear.	
Crown ring	Check for damage and corrosion	
Vertical tapes	Check turnbacks at crown ring	
	Check gates at any intersection with other tape	
	Check tapes for any damage or burnt	
	Check tape protectors and turnbacks at flying cables	
Horizontal tapes	Check parachute edge tape	
	Check all horizontal tapes at envelope	
	Check mouth tape	
Fabric panels	Check for damage or holes	
	Check porosity	
	Check any sign of overheating	
	Check joints and stitching	
Loops	Check for damages	
Centralizing lines	Check for damage or abrasion	
Control lines	Check for damage or abrasion	
Pulleys	Check for damage or malfunction	
Rings	Check for corrosion or abrasion	
Temp. sensor	Check if installed and in good condition	
Temperature tag	Check for overheating	
Flying cables	Check for damage or corrosion	
Karabiners	Check for corrosion or malfunction	
Repairs	Check all repairs are done according to Maintenance Manual	
Velcros	Check suitability and condition (special shapes may have additional velcros at appendixes)	

	Pasha Balloons Maintenance Manual	Iss. 7 Rev. 0 Date 01 July 2024
---	--	---

Pre-flight inspection checklist (basket)		
Basket Component	Criteria	Pass (✓) / Fail (x)
General	Check the general condition of the basket for any damage.	
Wires	Ensure that the basket wires are free of damage and twists.	
Load frame	Ensure that the load frame and poles fit correctly and are free of damage.	
Karabiners	Ensure that the attachment points are secure and that all karabiners are screwed locked.	
Fire extinguisher	Check for the presence of a fire extinguisher in state of readiness.	
Cylinder straps	Check that cylinder straps are in place and cylinders are secured.	

Pre-flight inspection checklist (burner)		
Burner Component	Criteria	Pass (✓) / Fail (x)
General	Check the general condition of the burner for any sign of damage.	
Valves	Ensure that all valves are working properly and closing after usage. Check no leak is advertised.	
Jets	Ensure that no jet is blocked when valve is actuated.	
Coil	Ensure that no damage is present at burner coil.	
Pressure gauge	Check for the presence of fuel gauge and marking is according to expected values of fuel pressure.	
Fuel hose	Check that no damage is advertised at fuel hose.	

Pre-flight inspection checklist (fuel tank)		
Fuel Tank Component	Criteria	Pass (✓) / Fail (x)
General	Check the general condition of the fuel tank for any sign of damage or any leak.	
	Ensure that fuel tanks securely strapped in the correct positions.	
	Check that all fuel tanks are functioning correctly	

	Pasha Balloons Maintenance Manual	<i>Iss. 7 Rev. 0 Date 01 July 2024</i>
---	--	---

6.4.2. Annual inspection checklists

Annual inspection checklist (envelope) – Every 12 calendar months		
Component	Criteria	Pass (✓) / Fail (x)
Crown line	Check for damage or wear.	
Crown ring	Check for damage and corrosion	
Vertical tapes	Check turnbacks at crown ring	
	Check gates at any intersection with other tape	
	Check tapes for any damage or burnt	
	Check tape protectors and turnbacks at flying cables	
Horizontal tapes	Check parachute edge tape	
	Check all horizontal tapes at envelope	
	Check mouth tape	
Fabric panels	Check for damage or holes	
	Check porosity	
	Check any sign of overheating	
	Check joints and stitching	
Grab test	Check fabric strength at top of the envelope and parachute edge is above 30lb or 13.6kg	
Loops	Check for damages	
Centralizing lines	Check for damage or abrasion	
Control lines	Check for damage or abrasion	
Pulleys	Check for damage or malfunction	
Rings	Check for corrosion or abrasion	
Temperature sensor	Check if installed and in good condition	
Temperature tag	Check for overheating	
Flying cables	Check for damage or corrosion	
Karabiners	Check for corrosion or malfunction	
Repairs	Check all repairs are done according to Maintenance Manual	
Velcros	Check suitability and condition (special shapes may have additional velcros at appendixes)	

Annual inspection checklist (basket) – Every 12 calendar months

Basket Component	Criteria	Pass (v) / Fail (x)
General	Check the general condition of the basket for damage.	
Wires	Ensure that the basket wires are free of damage and twists.	
Load frame	Ensure that the load frame and poles fit correctly and are free of damage.	
Karabiners	Ensure that the attachment points are secure and that all karabiners are screwed locked.	
Fire extinguisher	Check for the presence of a fire extinguisher in state of readiness.	
Cylinder straps	Check that cylinder straps are in place and cylinders are secured.	

Annual inspection checklist (burner) – Every 12 calendar months

Burner Component	Criteria	Pass (v) / Fail (x)
General	Check the general condition of the burner for any sign of damage.	
Valves	Ensure that all valves are working properly and closing after usage. Check no leak is advertised.	
Jets	Ensure that no jet is blocked when valve is actuated.	
Coil	Ensure that no damage is present at burner coil.	
Pressure gauge	Check for the presence of fuel gauge and marking is according to expected values of fuel pressure.	
Fuel hose	Check that no damage is advertised at fuel hose.	

Annual inspection checklist (fuel tank) – Every 12 calendar months

Fuel Tank Component	Criteria	Pass (v) / Fail (x)
General	Check the general condition of the fuel tank for any damage.	
Liquid Valve	Ensure that there is no damage, corrosion or leakage. Check if there is any wear at valve handle.	
Contents gauge	Ensure that it has movement (rolling horizontally) and that screws are tight. Check for any leak.	
Bleed Valve	Ensure that there is no damage, corrosion or leakage. Check it opens and closes properly.	
Pressure relief valve	Ensure there is no damage, contamination or leakage. Check due date.	
Padded cover	Ensure it is undamaged, in good condition, free from wear and tear.	
Guard ring cover	Ensure it is undamaged, in good condition, free from wear and tear.	

	<p align="center">Pasha Balloons Maintenance Manual</p>	<p align="right"><i>Iss. 7 Rev. 0 Date 01 July 2024</i></p>
---	--	--

6.5. Grab test procedure

This procedure determines the correct instruction to perform grab test to hot air balloon envelope fabric.

Select one panel of the top row of the envelope and one outer panel from parachute, place grab test tool in an area between 10 and 20 cm from the edge of the envelope/parachute aligned to fabric thread and with a separation between the rigs of 75mm.

When tool is correctly secured, pull from both sides until the dynamometer shows 13.6kg or 30lb. If fabric fails before the minimum value, complete panel must be replaced following section 2.2.1 of HABMM.

This test will be repeated in orthogonal direction using the same criteria.

If top 5 rows or parachute has more than one colour fabric, all colours must be tested at parachute outer panels and “highest” panel of each colour.

If any of the previous test fails for one colour, the following row of panels must be checked for the same fabric colour until test is passed and fabric is resistant enough. Then, repair must be done according to procedure 2.2 of this AMM.

Grab test tool must be supplied by Pasha Balloons.


6.6. Pressure test for fuel tanks

This test should be carried out 10 years after the engraved date of the Pasha Balloons’ fuel tank. Instructions for test are:

- Empty the tank in a safe way by using bleed valve or burner.
- Remove pressure relieve valve and install plug with Teflon tape.
- Remove content gauge valve.
- Make sure that tank is completely empty considering small amount of liquid propane may remain inside the tank even when it is open.
- Fill the tank with water.
- Install content gauge boss adaptor to pressure pump.
- Connect pressure pump and increase pressure until 30 bar.
- Do leak tests to all weldings and fittings.
- Keep pressure for 5 minutes checking it is not dropping from 30 bar.

After test is finished:

- Remove installed plug and adaptor
- Empty the tank and install PRV valve according to section 5.4 (removed or new one according to due date).
- Install contents gauge according with section 5.3.

	<p>Pasha Balloons Maintenance Manual</p>	<p><i>Iss. 7 Rev. 0</i></p> <p><i>Date 01 July 2024</i></p>
---	---	---

-Fill the tank with small quantity of propane or LPG and check there is no leak.

7. AIRWORTHINESS LIMITATIONS

7.1. Life limited parts

Pasha Balloons products have a component that is affected by the life limit change. The instructions and recommendations for life-limited component parts of other manufacturers must be followed.

Component	Component Lifetime	Recurrent
Envelope	None	-
Basket	None	-
Burner	None	-
Fuel Tank	PRV (Pressure Relief Valve)	10 YEARS from engraved date

7.2. Structural inspection interval

Validity of Certificate of Airworthiness is based on Maintenance schedules accomplishment. For Pasha Balloons, the interval of this inspections is:

- Envelopes: After one year or 100 flight hours, whichever occurs first.
- Baskets: After one year.
- Burners: After one year.
- Fuel Tanks: After one year.

This inspection interval may be extended based on the following conditions:

- The extension is no longer than 30 days.
- 100 flight hours are not exceeded during the extension.
- The extension is not adopted for two consecutive inspections.
- The extension is correctly recorded and signed in the balloon logbook by Continuing Airworthiness Management Organization responsible of this balloon.
- Service life limits are not exceeded during the extension.
- No applicable Airworthiness Directive is pending at the moment of the extension.
- No limitations, set beforehand, are recorded in the logbook to avoid extensions.

7.3. Structural Inspection procedures

Refer to section 6.4 of HABMM for inspection procedures.

	<p>Pasha Balloons Maintenance Manual</p>	<p><i>Iss. 7 Rev. 0</i></p> <p><i>Date 01 July 2024</i></p>
---	---	---

8. PARTS LIST

Pasha Balloons parts list is contained in document “Illustrated Part Catalogue / DO-10”. Latest version of the approved document will be published at Pasha Balloons website.